


# GAIA 75 Family

# GAIA R75



GA75-R01QS



GA75-R01QT

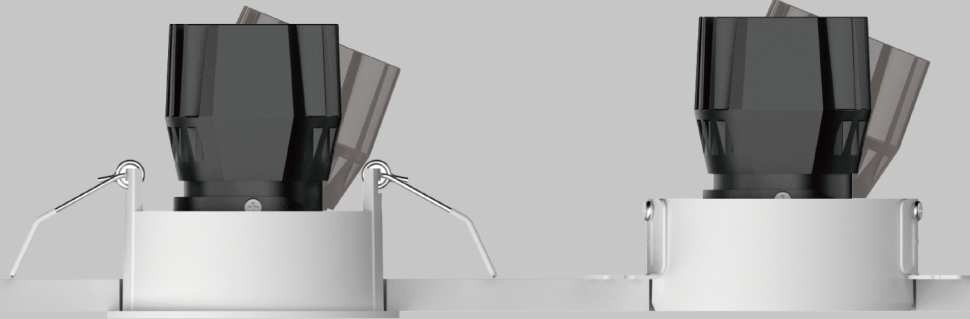



With Trim

Trimless


White



Black



Golden



GA75-R01QS



GA75-R01QT



## Basic Information

Model	GA75-R01QS/R01QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 12W
Input Voltage	DC36V
Input Current	Max. 300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA R75 Snout L



GA75-R03QS

GA75-R03QT



GAIA Family

With Trim

Trimless


White



Black



Golden

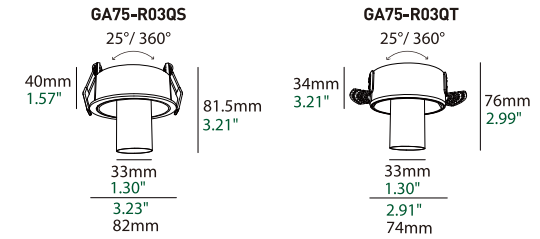

## Basic Information

Model	GA75-R03QS/R03QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	∅ 75mm
Light Direction	↓ 25° ⇄ 360°
IP Rating	IP20
Power	Max. 8W
Input Voltage	DC36V
Input Current	Max. 200mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▴ 15° ▴ 25° ▴ 35°
Shielding Angle	60°
UGR	< 9
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA R75 Snout



GA75-R05QS


GA75-R05QT





With Trim

Trimless



White



Black




Golden



GA75-R05QS

25°/ 360°



33mm  
1.30"

82mm  
3.23"

75mm  
2.95"

GA75-R05QT

25°/ 360°



33mm  
1.30"

74mm  
2.91"

75mm  
2.95"

## Basic Information

Model	GA75-R05QS/R05QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 12W
Input Voltage	DC36V
Input Current	Max. 300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35°
Shielding Angle	60°
UGR	<9
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI



# GAIA R75 Pinhole



GA75-R06QS

GA75-R06QT



With Trim

Trimless


White



Black




GA75-R06QS



20mm  
0.787"  
82mm  
3.23"

57mm  
2.24"

GA75-R06QT



20mm  
0.787"  
74mm  
2.91"

57mm  
2.24"

## Basic Information

Model	GA75-R06QS/R06QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 75mm
IP Rating	IP20
Power	Max. 12W
Input Voltage	DC36V
Input Current	Max. 300mA

## Optical Parameters

Light Source	LED COB
Lumens	50lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	25°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GA75-R08Q



GA75-R08QS

GA75-R08QT



With Trim

Trimless



White



Black



Gold

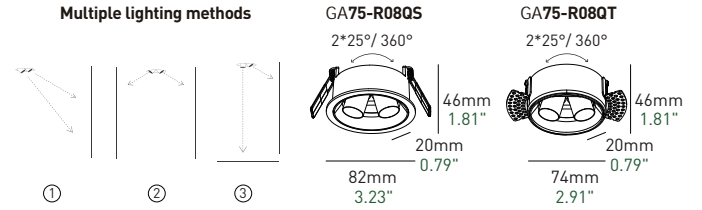

**Basic Information**

Model	GA75-R08Q
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White/Black/Gold
Material	Pure aluminum
Cutout Size	∅ 75mm
Light Direction	⬇ 2*25° ⬅ 360°
IP Rating	IP20
Power	Max.8W
Input Voltage	DC36V
Input Current	Max. 180mA

**Optical Parameters**

Light Source	LED COB
Lumens	45lm/W
CRI	90Ra
CCT	3000K ● 3500K ● 4000K ●
Beam Angle	⬇ 15° ⬇ 25° ⬇ 20° × 50°
UGR	< 10
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

Milki Family

GAIA R75 IP65



GA75-R65QS




With Trim


White



Black



GA75-R65QS



79mm  
3.11"

82mm  
3.23"

GAIA Family

### Basic Information

Model	GA75-R65QS
Embedded Parts	With Trim
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	75mm
IP Rating	IP65
Power	Max. 12W
Input Voltage	DC36V
Input Current	Max. 300mA

### Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GA75-R45Q



Milki Family

GA75-R45QS

GA75-R45QT





With Trim

Trimless

White



Black



**Basic Information**

Model	GA75-R45Q
Embedded Parts	With TriGTrimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Pure aluminum
Cutout Size	∅ 75mm
Light Direction	15° 360°
IP Rating	IP20
Power	Max.8W
Input Voltage	DC36V
Input Current	Max. 200mA

**Optical Parameters**


Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra/90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
UGR	< 16
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA R75-S



GA75-R01QS (with plate M-GA01-K01)

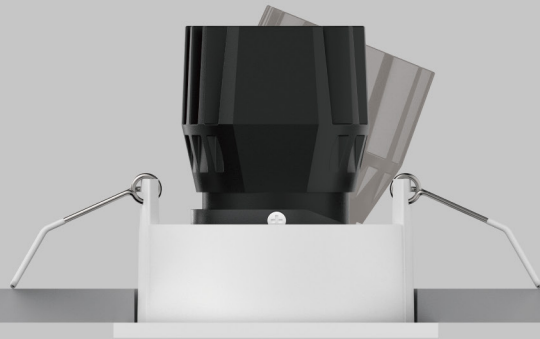

White

Black

White



Black



GA75-R01QS (with plate M-GA01-K01)

M-GA01-K01



GA75-R01QS



25° / 360°



83mm  
3.27"

82mm  
3.23"  
86mm  
3.39"

## Basic Information

Model	GA75-R01QS (with plate M-GA01-K01)
Embedded Parts	With Trim
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max.12W
Input Voltage	DC36V
Input Current	Max. 300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V


Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI



# GAIA R75-2S



Double GA75-R01QS (with plate M-GA01-K02)

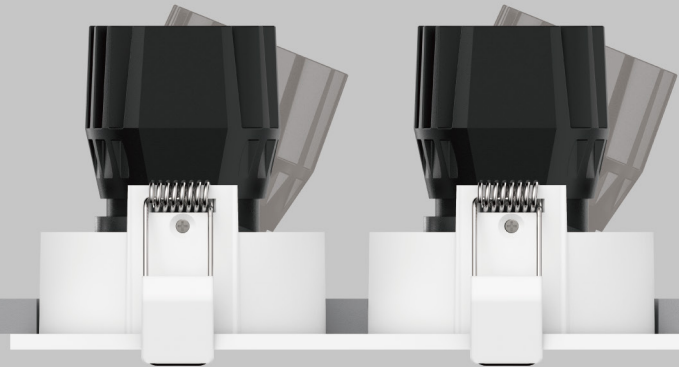

White

Black



White



Black



Double GA75-R01QS (with plate M-GA01-K02)



## Basic Information

Model	Double GA75-R01QS (with plate M-GA01-K02)
Embedded Parts	With Trim
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	160*75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 2*12W
Input Voltage	DC36V
Input Current	Max. 2*300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA S75 Single




GAIA Family

GA75-S01QS

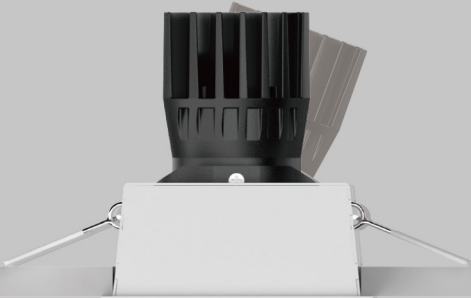

GA75-S01QT




With Trim

Trimless


White



Black



Golden



GA75-S01QS

25°/360°




82mm  
3.23"

87mm  
3.43"

GA75-S01QT

25°/360°



74mm  
2.91"

87mm  
3.43"

## Basic Information

Model	GA75-S01QS/S01QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	75*75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 12W
Input Voltage	DC36V
Input Current	Max. 300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V


Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA S75 Double



GA75-S01QS2

GA75-S01QT2

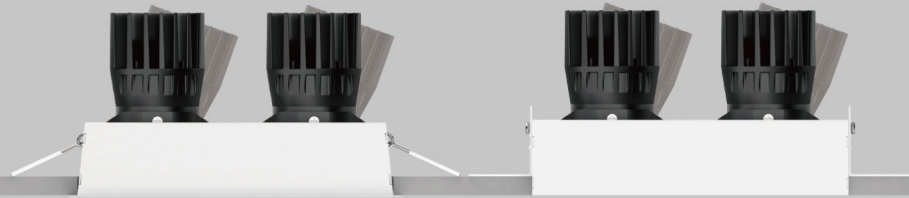


With Trim

Trimless


White



Black




Golden



GA75-S01QS2

25°/360°




156\*82mm  
6.14\*3.23"

87mm  
3.43"

GA75-S01QT2

25°/360°



148\*74mm  
5.83\*2.91"

87mm  
3.43"

## Basic Information

Model	GA75-S01QS2/S01QT2
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	150*75mm
Light Direction	25° 360°
IP Rating	IP20
Power	Max. 2*12W
Input Voltage	DC36V
Input Current	Max. 2*300mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	46°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA 55 Family


GAIA Family



GA55-R01Q



GA55-R01QS



GA55-R01QT



With Trim

Trimless

White



Black



GA55-R01QS


20°/ 360°



64mm  
2.52"

GA55-R01QT

20°/ 360°



78mm  
3.07"

GAIA Family

**Basic Information**

Model	GA55-R01QS/T
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 55mm
Light Direction	⌵ 20° ⌚ 360°
IP Rating	IP20
Power	Max.10W
Input Voltage	DC36V
Input Current	Max. 250mA

**Optical Parameters**

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra/ 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	⌵ 35°
Shielding Angle	48°
UGR	< 8
LED Lifespan	50000hrs
Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI



GA55-R03Q



GA55-R03QS

GA55-R03QT



With Trim

Trimless


White



Black



Gold

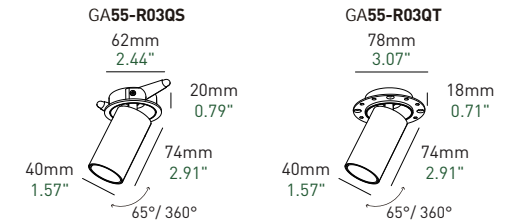

**Basic Information**

Model	GA55-R03Q
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White/Black/Gold
Material	Pure aluminum
Cutout Size	∅ 55mm
Light Direction	↙ 65° ↘ 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

**Optical Parameters**

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra/90Ra
CCT	3000K ● 3500K ● 4000K ●
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▲ 15° ▲ 25° ▲ 35°
UGR	< 9
LED Lifespan	50000hrs


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

Milki Family

GA55-R44Q




GA55-R44QS



GA55-R44QT



With Trim





White


Trimless




Black



GA55-R44QS



GA55-R44QT



GAIA Family

### Basic Information

Model	GA55-R44QS/T
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 55mm
Light Direction	Fixed
IP Rating	IP44
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

### Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▮ 15° ▮ 25° ▮ 35° ▮ 50°
Shielding Angle	38°
UGR	< 16
LED Lifespan	50000hrs


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GA55-R65Q



GA55-R65QS

GA55-R65QT

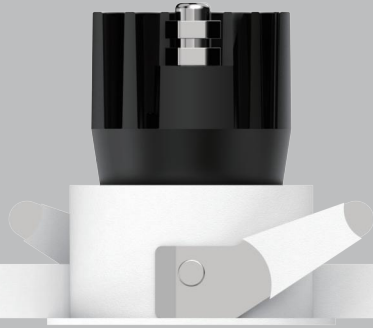


With Trim

Trimless

White



Black




GA55-R65QS



72mm  
2.83"

64mm  
2.52"

GA55-R65QT



72mm  
2.83"

78mm  
3.07"

GAIA Family

### Basic Information

Model	GA55-R65QS/R65QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black
Material	Aluminum
Cutout Size	∅ 55mm
Light Direction	Fixed
IP Rating	IP65
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

### Optical Parameters


Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	38°
UGR	< 16
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA R55 Semi-recessed



GA55-R11QS




White



Black




Golden



GAIA Family



GA55-R11QS



## Basic Information

Model	GA55-R11QS
Mounting	Semi-recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	∅ 55mm
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

## Optical Parameters


Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▲ 15° ▲ 25° ▲ 35° ▲ 50°
Shielding Angle	42°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GAIA R55 Trumpet



GA55-R21QS



White




Black



Golden



GA55-R21QS



## Basic Information

Model	GA55-R21QS
Mounting	Semi-recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Aluminum
Cutout Size	∅ 55mm
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	55°
UGR	<9
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI